



## Mounting



## Specification



## SmartScan Configurations



Find out more at [www.thorlux.com/smartsan](http://www.thorlux.com/smartsan)

## LED Characteristics

CRI	80+
COLOUR TEMPERATURE	4000K
RATED LIFE (HOURS)	100K-L80/B10
PROTECTION	LUX GUARD
DRIVER EFFICIENCY	88%
REPLACEABLE	YES
POWER FACTOR	>0.9
<b>LL/CW</b>	<b>103.1</b>

ENERGY EFFICIENCY CLASSIFICATION **B**

For LED characteristics explanation see [www.solite-europe.com/led-guide](http://www.solite-europe.com/led-guide)

Surface mounted, front access luminaire designed for clean and sterile environments up to FS209E class 100. IP65 ensures maximum protection is maintained at all times, even when the cover is removed.

## Applications

- Clean and sterile environments up to FS209E class 100, ISO 14644 class 5
- Pharmaceutical production
- Pharmacies
- Hospitals
- Laboratories
- Electronics manufacturing
- Semiconductor manufacturing
- Food preparation manufacturing

## Construction

- Zinc plated surface mounted steel body
- Chamfered 55mm aluminium diffuser frame, with welded and finished corners
- Polyester powder coated body and frame
- Polycarbonate fire-retardant diffuser, TP(a)
- White EDPM closed cell gaskets

## Finish

- Solite White (RAL9016, 90% gloss) \*
- Satin opal diffuser

\* Please confirm colour on order

## Features

- Fixed output, 4000K, CRI80 as standard
- Conforms to FS209E class 100, ISO14644 class 5 standard.
- IP65
- LUX Guard, LED Protection
- Removable LED platform for improved sustainability and longer life cycle

## Options

- Special RAL colour \*\*
- Anti-bacterial paint \*\*
- 3000K or 6500K LED light engine \*\*
- CRI90 LED light engine \*\*
- Screwless frame. Add '+SCREWLESS'
- Deglaring lens: LG7 compliant, providing <math><1500\text{cd}/\text{m}^2</math>. Replace 'S' suffix with: '+LG7P' LG7+clear polycarbonate / '+LG7G' LG7+toughened glass
- Toughened glass front panel: For applications where corrosive cleaning agents may be applied. Glass is supplied in addition to the satin polycarbonate panel. Replace 'S' suffix with 'TGS'

\*\* Available on request, contact sales

## Controls Options

- DALI or SmartScan

## Emergency Options, 3 hour integral \*\*\*

- Standard, Self-test, DALI or SmartScan

\*\*\* Central battery, contact sales

## Range

LED	CAT. NO.	SIZE	APPROX. kg
26W	<b>GAMMA2226WLED4S</b>	600mm x 600mm	10.5
38W	<b>GAMMA2238WLED4S</b>		
45W	<b>GAMMA2245WLED4S</b>		
54W	<b>GAMMA2254WLED4S</b>		
75W	<b>GAMMA2275WLED4S</b>		
52W	<b>GAMMA4252WLED4S</b>	1100mm x 600mm	19.0
76W	<b>GAMMA4276WLED4S</b>		
90W	<b>GAMMA4290WLED4S</b>		
108W	<b>GAMMA42108WLED4S</b>		
40W	<b>GAMMA4140WLED4S</b>	1220mm x 300mm	12.5
49W	<b>GAMMA4149WLED4S</b>		
64W	<b>GAMMA4164WLED4S</b>		


CIRCUIT TYPE - suffix catalogue number with:

**DALI-DIM** - DALI dimmable / **SSCAN** - SmartScan e.g. **GAMMA2238WLED4S+DALI-DIM**


EMERGENCY VERSION - suffix catalogue number with:

**EM** - standard 3 hour integral / **EM-ST** - Emergency Self-test 3 hour integral / **DALI-EM** - DALI 3 hour integral / **SSCAN-EM** - SmartScan 3 hour integral e.g. **GAMMA2238WLED4S+EM**

## Dimensions

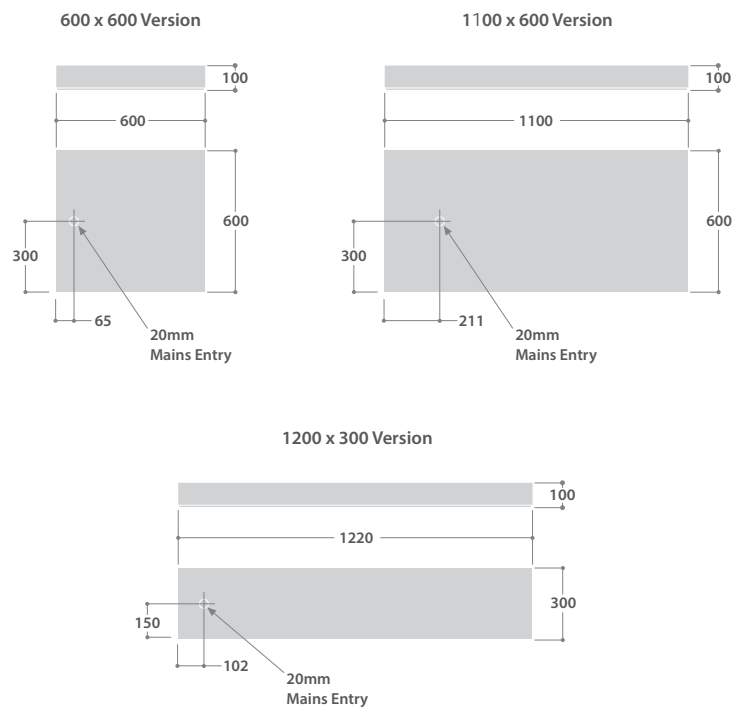

## Photometric Guide

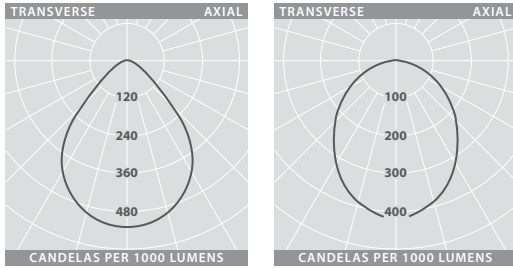

### LG7 ENABLING

Luminaire Lumen Output 600x600

26W = 3380lm

38W = 4705lm

45W = 5485lm

54W = 6320lm

75W = 8405lm

Emergency = 422lm ▲

Luminaire Lumen Output 1200x600

52W = 6765lm

76W = 9410lm

90W = 10970lm

108W = 12635lm

Emergency = 380lm ▲

### SATIN

Luminaire Lumen Output 600x600

26W = 3190lm

38W = 4435lm

45W = 5175lm

54W = 6120lm

75W = 7625lm

Emergency = 396lm ▲

Luminaire Lumen Output 1200x600

52W = 6380lm

76W = 8875lm

90W = 10350lm

108W = 12235lm

Emergency = 356lm ▲

Luminaire Lumen Output 1200x300

40W = 4576lm


49W = 5538lm

64W = 6940lm

Emergency = 376lm ▲

▲ NOTE: Emergency lumen output does not change according to wattage.  
(Lumen output for central battery systems will vary according to the installation)

## Mounting Arrangement

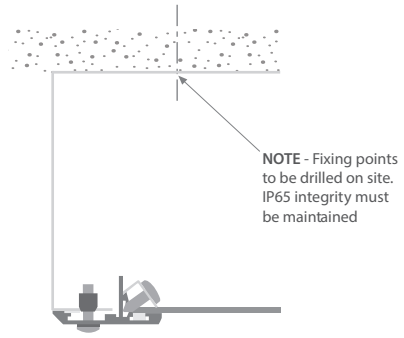

NOTE - Fixing points to be drilled on site. IP65 integrity must be maintained